



Assembly instructions for our Unsplash M02 on your fork

Downhill | Enduro | Trail | All Mountain | Marathon | XC | 24"-29"



- Open the packaging and take the M02 mudguard, the enclosed Velcro straps and the protective strips for the suspension fork out of the packaging.
- For assembly you will need cleaning cloth, cleaner and scissors.


Attaching the paint protection strips



- To apply the paint protection strips, remove the front wheel and clean the inside of the suspension fork with a cloth and a suitable cleaner (see picture 1).

Now we take the longer piece of foil (35 x 120 mm) and fit it to the triple clamp with scissors. To do this, we put the strip on the inside to measure, if necessary mark the cutting lines with a pencil (see picture 2).

IMPORTANT: there should be about 2 mm of space left on each side at the edges so that it does not go over the edges (see picture 1 on the next page).

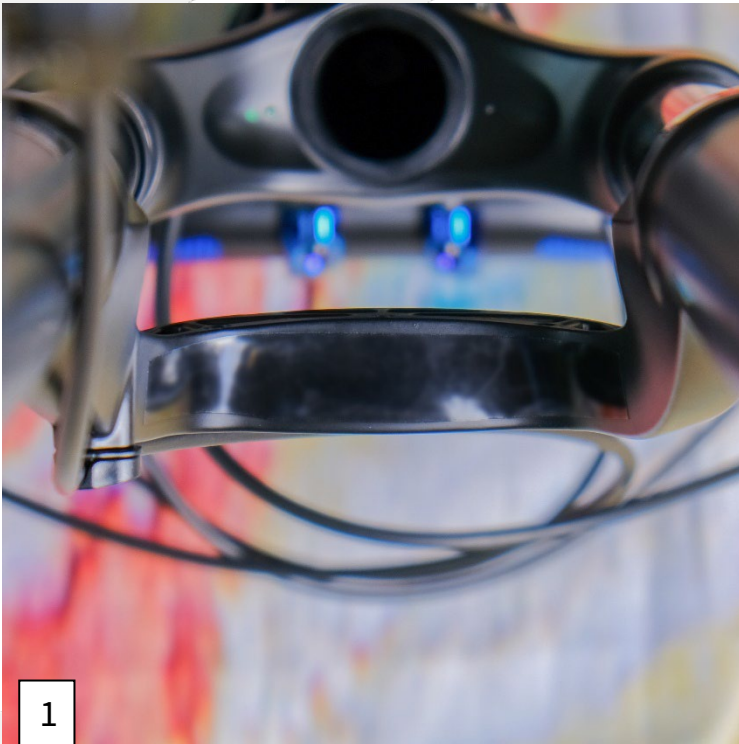


- The protective strip is then applied to the cleaned surface (see picture 1).
- The two remaining strips are attached to the inside of each dip tube (see picture 2).
- After all paint protection strips are in place, the front wheel is remounted.



1




2

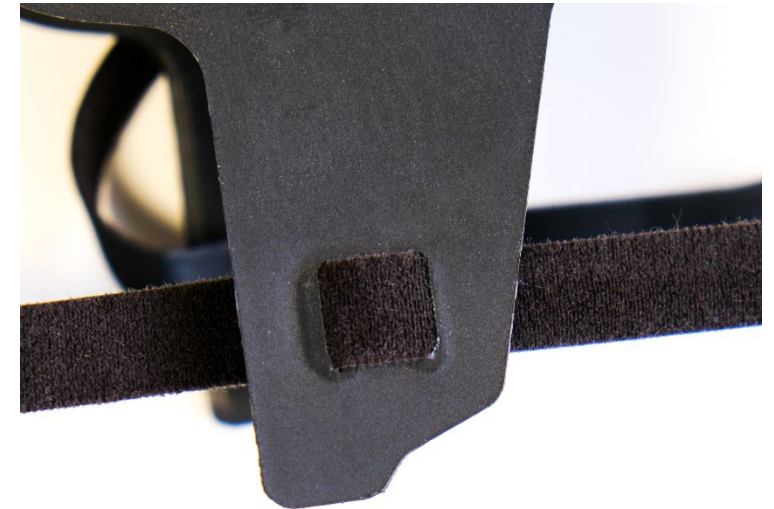

3

- First, prepare the mudguard for assembly by threading all the Velcro ties into the mudguard (see picture 1).
- The Velcro ties for fastening to the triple clamp (the upper ones) are threaded from the outside to the outside (see picture 2).
- The lateral Velcro ties for fastening to the dip tubes are threaded from the inside to the inside (see picture 3).

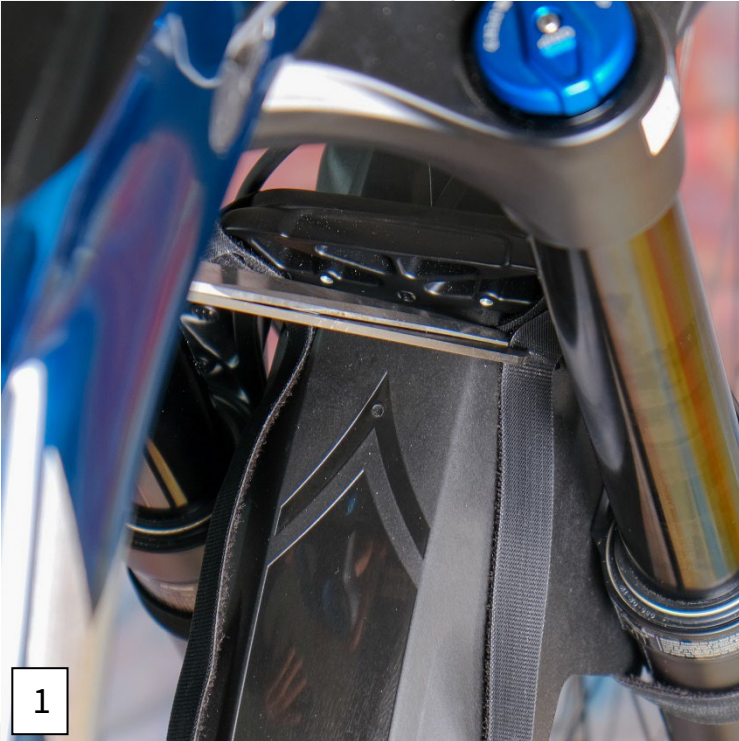

- After preparation, the mudguard is pre-assembled to determine the length of the Velcro straps for attachment to the triple clamp. After tightening the Velcro straps (see pictures 1 and 3), the Velcro strap is shortened at the lowest end (see picture 1). To do this, we recommend dismantling the mudguard and then shortening the Velcro strap (see picture 2).



➤ Finally, the mudguard is pushed in again and all Velcro ties are tightened (see pictures 1 and 2)

After you have tightened all Velcro ties you are ready! (see picture 3)